

ESC TIME SCHEDULE			
NOTE: GENERAL CONTRACTOR TO COMPLETE TABLE WITH THEIR PROJECT SCHEDULE			
CONSTRUCTION SEQUENCE (MONTH)	TEMPORARY CONTROL MEASURES	STRIP AND STOCKPILE TOPSOIL	ROUGH GRADE SEDIMENT CONTROL
STRUCTURE CONSTRUCTION	SITE CONSTRUCTION	STORM INSTALLATION	FINISH GRADING
TURF ESTABLISHMENT			


LEGEND	
	CONCRETE WALK
	BITUMINOUS TRAIL
	ORANGE CONSTRUCTION FENCE
	SILT FENCE
	INLET PROTECTION
	SOD (MMDOT SPEC 2575.3)
	DIRECTION OF PROPOSED FLOW

OWNER: BARRY BAH, (OR DESIGNED) ST. CLOUD VA HEALTHCARE SYSTEM 4801 VETERANS DRIVE ST. CLOUD, MN 56303	
GENERAL CONTRACTOR:	
CONTRACTOR SWPPP QUALIFIED PERSONNEL:	

EROSION CONTROL QUANTITIES:	
MMDOT SOD (#57/3.3)	8,720 SY
SILT FENCE	8,280 LF
INLET PROTECTION	8 EA
ROCK CONSTRUCTION ENTRANCE	250 SY
ORANGE CONSTRUCTION FENCE	10,200 LF

- NOTES:
1. SALVAGE AND REPLACE EXISTING TOPSOIL. SCREEN PRIOR TO PLACEMENT AND FERTILIZE UPON STABILIZATION.
 2. SILT FENCE SHALL BE PROVIDED ON ALL AREAS DOWN GRADIENT OF CONSTRUCTION ACTIVITY.
 3. INLET PROTECTION SHALL BE PROVIDED ON ALL CATCH BASINS AND INLETS DOWN GRADIENT OF CONSTRUCTION ACTIVITY AND AS INDICATED ON THE PLAN.
 4. ALL DISTURBED AREAS SHALL BE RESTORED WITH 6" MINIMUM TOPSOIL AND STABILIZED WITH MMDOT SALT RESISTANT SOD SPEC. #3978.2C.
 5. PROVIDE ROCK CONSTRUCTION ENTRANCES. IF SEDIMENT TRACKING SHOULD OCCUR, IT IS THE CONTRACTOR'S RESPONSIBILITY TO SWEEP STREETS AS NECESSARY TO MINIMIZE SEDIMENT TRACKING.
- SEQUENCE OF CONSTRUCTION:
1. INSTALL STABILIZED ROCK CONSTRUCTION ENTRANCE(S).
 2. PROVIDE ORANGE CONSTRUCTION FENCE AROUND ENTIRE PERIMETER OF CONSTRUCTION AREA (SEE DETAIL 30C410).
 3. INSTALL SILT FENCE.
 4. CONTACT OWNER'S REPRESENTATIVE TO INSPECT BMPs. GENERAL CONTRACTOR SHALL HOLD A STORMWATER PRE-CONSTRUCTION MEETING WITH ALL HIS SUB-CONTRACTORS PRIOR TO CONSTRUCTION.
 5. PROVIDE INLET PROTECTION ON INLETS DOWN GRADIENT OF CONSTRUCTION ACTIVITY.
 6. BEGIN GRADING THE SITE.
 7. TEMPORARILY SEED DISTURBED AREAS AND STABILIZE WITHIN 24 HOURS OF ACTIVELY BEING WORKED.
 8. INSTALL STORM SEWER AND ASSOCIATED PIPING AND STRUCTURES. INSTALL RIP RAP AT OUTLETS.
 9. BACKFILL ALL TRENCHES IMMEDIATELY, AND AT THE END OF THE WORKING DAY, NO OPEN TRENCHES ALLOWED OVERNIGHT.
 10. REINSTALL ANY DISTURBED INLET PROTECTION DEVICES.
 11. PREPARE SITE FOR SURFACING.
 12. CONSTRUCT CONCRETE WALK AND PAVE BITUMINOUS TRAIL.
 13. COMPLETE FINAL GRADING WITH SALVAGED (SCREENED) TOPSOIL. FERTILIZE AND STABILIZE WITH SOD IMMEDIATELY AFTER COMPLETION OF GRADING.
 14. ALL EROSION AND SEDIMENT CONTROL BMPs TO BE APPROVED BY THE VA.
 15. CONTRACTOR TO HAVE CERTIFIED PERSONNEL TO FOLLOW ALL SWPPP REQUIREMENTS.
 16. REMOVE ALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES (ONLY IF SITE IS STABILIZED, AND APPROVED BY THE VA).
 17. CONTRACTOR TO WORK WITH THE VA TO OBTAIN ALL REQUIRED PERMITS.
 18. ALL DISTURBED AREAS SHALL BE RESTORED AND STABILIZED WITHIN 7 DAYS OF CONSTRUCTION.

100% CDS - FOR CONSTRUCTION

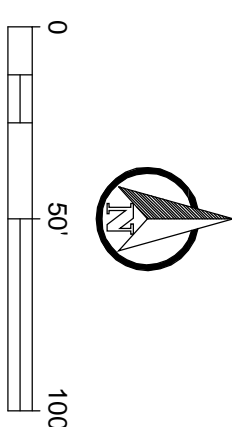

Revision	
AMENDMENT	02-II-2008
Date	

Design Tree
ENGINEERING AND
LAND SURVEYING

Alexandria Office
1201 17th Avenue W
Alexandria, MN 56308
(507) 762-1250

St. Cloud Office
3339 West St. Germain, Suite 250
St. Cloud, MN 56301
(507) 217-3537

JLG
architects

Alexandria
525 Broadway Street
Alexandria, MN 56308
phone 320.759.9030
facsimile 320.759.9062
www.jlgarchitects.com
copyright © 2012

STAMP/SCALE
I HEREBY CERTIFY THAT THIS PLAN,
SPECIFICATION, OR REPORT WAS PREPARED
BY ME OR UNDER MY CLOSE PERSONAL
SUPERVISION AND THAT I AM A DULY LICENSED ENGINEER
UNDER THE LAWS OF THE STATE OF
MINNESOTA.

DATE: 10/16/2012

REG. NO. 45489

Drawing Title
EROSION CONTROL PLAN

Project Title
CREATE CAMPUS WALKING PATH

Approved Project Director

Location
VA MEDICAL CENTER ST. CLOUD, MN 56303

Date
10/16/2012

DWF

Drawn
GMD

Dwg 12 of 24

Project Number
02212002

Building Number

Drawing Number
C30

VAMC
SAINT CLOUD
MN