NOTE:
GAS OUTLETS TO BE MSC STANDARD BRAND OUTLET WITH CONNECTION TO MATCH EXISTING HOSPITAL EQUIPMENT

NOTE: THIS APPLICATION IS NOT SUITABLE FOR EXISTING, INACCESSIBLE WALLS. PLEASE CONTACT YOUR SALES REPRESENTATIVE FOR AN ALTERNATE PROPOSAL.

MODULAR SERVICES COMPANY 110 N. E. 38TH TERRACE OKLAHOMA CITY, OK. 73105

PROJECT: VETERAN'S AFFAIRS MEDICAL CENTER IOWA CITY, IA

REVISED

PROVIDER PLUS™ DESIGNER SYSTEM MODEL 6600-PC

SCALE: =1'

DATE	DRAWN BY	DRAWING #
09/25/08	TMW	PR-19460

7 REQ'D: X AS SHOWN -- OPPOSITE

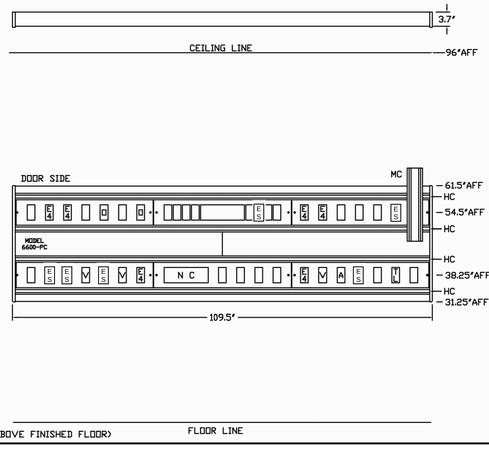

LEGEND

REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET
1	A	AIR OUTLET
3	V	VACUUM OUTLET
6	E4	DUPLEX RECEPTACLE, 8300 RED, 20A, 125V, H.G., EMER. POWER
1	NC	NURSE CALL PROVISION
1	TL	TELEPHONE OUTLET PROVISION SINGLE CAT 5, RJ-45 RECEPTACLE
1	MC	MONITOR CHANNEL ONLY
4	HC	HORIZONTAL ACCESSORY CHANNEL
6	ES	DUPLEX RECEPTACLE, 20A, 125V, H.G., NORMAL POWER

	QTY	ACCESSORIES NOT SHOWN (PER UNIT)
1	1	513-1411 SMALL ITEM STORAGE BASKET, 24.5"W X 5"D X 3"H, POST MOUNT
1	1	513-1425 LARGE STORAGE BASKET, 18"W X 9"D X 7"H, POST MOUNT
1	5	511-1009 PROVIDER™ CHANNEL BRACKET WITH 1/2" SOCKET, FOR POST MOUNT ACC.
1	2	514-1610 DUAL SUPPLY CLIP, PROVIDER™ CHANNEL MOUNT
1	1	514-1616 GLOVE BOX HOLDER AND ADAPTOR ASSEMBLY, 2-BOX, PROVIDER CHANNEL MOUNT
1	3	520-2703 VACUUM BOTTLE SLIDE, PROVIDER™ CHANNEL MOUNT
1	1	530-4524 BRKT ASSY FOR WELCH-ALLYN 767 SERIES OPHTHALMOSCOPE, POST MOUNT

PATIENT ROOM HEADWALL LAYOUT #1
NOT TO SCALE

NOTE:
GAS OUTLETS TO BE MSC STANDARD BRAND OUTLET WITH CONNECTION TO MATCH EXISTING HOSPITAL EQUIPMENT

1 ITEM IS PRICED SEPARATELY.

NOTE: THIS APPLICATION IS NOT SUITABLE FOR EXISTING, INACCESSIBLE WALLS. PLEASE CONTACT YOUR SALES REPRESENTATIVE FOR AN ALTERNATE PROPOSAL.

MODULAR SERVICES COMPANY 110 N. E. 38TH TERRACE OKLAHOMA CITY, OK. 73105

PROJECT: VETERAN'S AFFAIRS MEDICAL CENTER IOWA CITY, IA

REVISED 07/08/08 09/25/08

PROVIDER PLUS™ DESIGNER SYSTEM MODEL 6600-PC

SCALE: =1'

DATE	DRAWN BY	DRAWING #
06/23/08	TMW	PR-18877

1 REQ'D: X AS SHOWN -- OPPOSITE

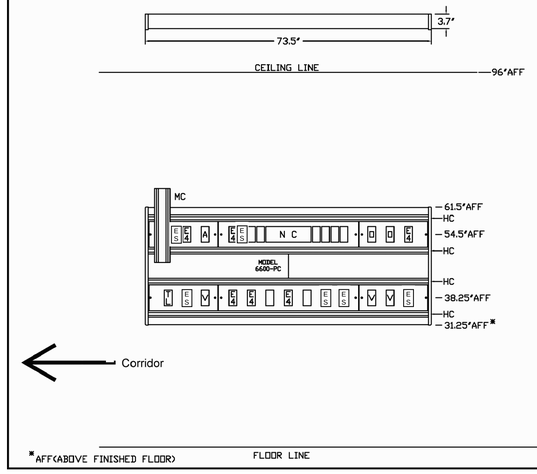

LEGEND

REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET
1	A	AIR OUTLET
3	V	VACUUM OUTLET
6	E4	DUPLEX RECEPTACLE, 8300 RED, 20A, 125V, H.G., EMER. POWER
1	NC	NURSE CALL PROVISION
1	TL	TELEPHONE OUTLET PROVISION SINGLE CAT 5, RJ-45 RECEPTACLE
4	HC	HORIZONTAL ACCESSORY CHANNEL
1	MC	MONITOR CHANNEL ONLY
6	ES	DUPLEX RECEPTACLE, 20A, 125V, H.G., NORMAL POWER

	QTY	ACCESSORIES NOT SHOWN (PER UNIT)
1	1	513-1411 SMALL ITEM STORAGE BASKET, 24.5"W X 5"D X 3"H, POST MOUNT
1	1	513-1425 LARGE STORAGE BASKET, 18"W X 9"D X 7"H, POST MOUNT
1	5	511-1009 PROVIDER™ CHANNEL BRACKET WITH 1/2" SOCKET, FOR POST MOUNT ACC.
1	2	514-1610 DUAL SUPPLY CLIP, PROVIDER™ CHANNEL MOUNT
1	1	514-1616 GLOVE BOX HOLDER AND ADAPTOR ASSEMBLY, 2-BOX, PROVIDER CHANNEL MOUNT
1	3	520-2703 VACUUM BOTTLE SLIDE, PROVIDER™ CHANNEL MOUNT
1	1	530-4524 BRKT ASSY FOR WELCH-ALLYN 767 SERIES OPHTHALMOSCOPE, POST MOUNT

PATIENT ROOM HEADWALL LAYOUT #3
NOT TO SCALE

NOTE:
GAS OUTLETS TO BE MSC STANDARD BRAND OUTLET WITH CONNECTION TO MATCH EXISTING HOSPITAL EQUIPMENT

NOTE: THIS APPLICATION IS NOT SUITABLE FOR EXISTING, INACCESSIBLE WALLS. PLEASE CONTACT YOUR SALES REPRESENTATIVE FOR AN ALTERNATE PROPOSAL.

MODULAR SERVICES COMPANY 110 N. E. 38TH TERRACE OKLAHOMA CITY, OK. 73105

PROJECT: VETERAN'S AFFAIRS MEDICAL CENTER IOWA CITY, IA

REVISED

PROVIDER PLUS™ DESIGNER SYSTEM MODEL 6600-PC

SCALE: =1'

DATE	DRAWN BY	DRAWING #
09/25/08	TMW	PR-19459

7 REQ'D: X AS SHOWN -- OPPOSITE

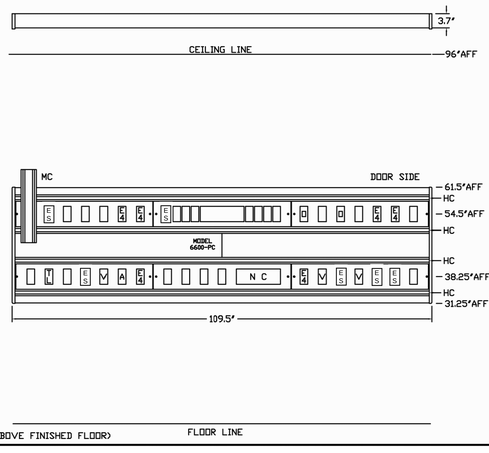

LEGEND

REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET
1	A	AIR OUTLET
3	V	VACUUM OUTLET
6	E4	DUPLEX RECEPTACLE, 8300 RED, 20A, 125V, H.G., EMER. POWER
1	NC	NURSE CALL PROVISION
1	TL	TELEPHONE OUTLET PROVISION SINGLE CAT 5, RJ-45 RECEPTACLE
1	MC	MONITOR CHANNEL ONLY
4	HC	HORIZONTAL ACCESSORY CHANNEL
6	ES	DUPLEX RECEPTACLE, 20A, 125V, H.G., NORMAL POWER

	QTY	ACCESSORIES NOT SHOWN (PER UNIT)
1	1	513-1411 SMALL ITEM STORAGE BASKET, 24.5"W X 5"D X 3"H, POST MOUNT
1	1	513-1425 LARGE STORAGE BASKET, 18"W X 9"D X 7"H, POST MOUNT
1	5	511-1009 PROVIDER™ CHANNEL BRACKET WITH 1/2" SOCKET, FOR POST MOUNT ACC.
1	2	514-1610 DUAL SUPPLY CLIP, PROVIDER™ CHANNEL MOUNT
1	1	514-1616 GLOVE BOX HOLDER AND ADAPTOR ASSEMBLY, 2-BOX, PROVIDER CHANNEL MOUNT
1	3	520-2703 VACUUM BOTTLE SLIDE, PROVIDER™ CHANNEL MOUNT
1	1	530-4524 BRKT ASSY FOR WELCH-ALLYN 767 SERIES OPHTHALMOSCOPE, POST MOUNT

PATIENT ROOM HEADWALL LAYOUT #2
NOT TO SCALE

NOTICE: THE HEADWALL DRAWINGS ON THIS SHEET ARE INCLUDED AS A BASIS OF DESIGN TO INDICATE UNIT DIMENSIONS AND PROVIDE QUANTITY AND CONFIGURATION OF COMPONENTS AND ACCESSORIES.

CONTRACTOR IS TO PROVIDE HEADWALL UNIT TO MATCH HEADWALLS INSTALLED AT THE 7W WING. QUANTITIES AND CONFIGURATIONS OF OUTLETS TO MATCH THOSE AT 7W.

LAYOUTS CORRESPOND TO THE FLOOR PLAN AS FOLLOWS:

HEADWALL LAYOUT #1 (7 ROOMS TOTAL):
- 7E05 PATIENT ROOM 6
- 7E03 PATIENT ROOM 4
- 7E31 PATIENT ROOM 3
- 7E35 PATIENT ROOM 1
- 7E34 PATIENT ROOM 10
- 7E13 PATIENT ROOM 13
- 7E16 PATIENT ROOM 14

HEADWALL LAYOUT #2 (7 ROOMS TOTAL):
- 7E07 PATIENT ROOM 5
- 7E33 PATIENT ROOM 2
- 7E36 PATIENT ROOM 11
- 7E32 PATIENT ROOM 9
- 7E17 PATIENT ROOM 12
- 7E18 PATIENT ROOM 15
- 7E08 PATIENT ROOM 8

HEADWALL LAYOUT #3 (1 ROOM TOTAL):
- 7E06 PATIENT ROOM 7

Department of Veteran Affairs
Iowa City VAMC
601 Highway 6W
Iowa City, IA 52246

FULLY SPRINKLERED
CONSTRUCTION DOCUMENTS

Revisions:	Date

KEY PLAN:



STAMP:

CONSULTANTS:

NIKA Technologies, Inc.
Engineering and Management Consultants
11400 Rockville Pike, Ste 505
N. Bethesda, MD 20852
p: 301.770.3520 f: 301.770.3521
www.nikatechnologies.com

ARCHITECT/ENGINEERS:

2310 Crossroads Drive Suite 2000 • Madison WI 53718 • Tel 608 240-9900 • Fax 608 240-9690
11000 West Park Place • Milwaukee WI 53224 • Tel 414 359-3060 • Fax 414 359-3070
Plunkett Raysich Architects LLP
Intelligent Designs Inspired Results
www.prarch.com

Drawing Title	PATIENT ROOM HEADWALL LAYOUTS
Approved: Project Director	
Project Title	RENOVATE INPATIENT MEDICAL/ SURGICAL WARD, 7E
Location	IOWA CITY VA MEDICAL CENTER
Date	07/07/2009
Checked	
Drawn	
Project Number	636A8-10-001
Building Number	1
Drawing Number	1-HW1
	Dwg. 38 of 44

Office of Construction and Facilities Management

Department of Veterans Affairs

VA FORM 08-6231, OCT 1978

Plunkett Raysich Architects, LLP – P:\07111\CAD\07111 Bldg 1, Floor 5-7-Headwalls.dwg [7E HEADWALLS] March 19, 2009 – 1:19pm abrellow