



# GENERAL DRAWING NOTES:


- REVIEW EACH SYSTEM WITH VA BEFORE RELOCATING. TEST FOR PROPER OPERATION OF ALL COMPONENTS AND REPORT ANY MALFUNCTIONING COMPONENTS BEFORE RELOCATIONS. CONTRACTOR IS RESPONSIBLE FOR SYSTEMS BEING RESTORED TO PRECONSTRUCTION CONDITION AT COMPLETION OF PROJECT.
- SYSTEMS TO BE RELOCATED INCLUDE FIRE ALARM, CCTV, SECURITY, ZETRON ALARMS, TELEPHONE, DATA, PUBLIC ADDRESS, EMERGENCY PHONES, RADIO, UPS ALARM, MEDICAL GAS ALARMS, INTERCOMS.
- POWER REMOVALS SHALL BE REMOVED BACK TO SOURCE. INCLUDE REMOVAL OF RACEWAY, BOXES, SUPPORTS AND LABELING. RESTORE POWER TO DEVICES ON CIRCUIT THAT ARE TO REMAIN. RELABEL UNUSED BREAKERS AS SPARE. RETYPE PANEL CIRCUIT DIRECTORIES AT PANELS AFFECTED BY PROJECT WORK.
- SECURITY AND LOW VOLTAGE COMMUNICATION REMOVALS SHALL INCLUDE REMOVAL OF CABLES, WIRING, RACEWAY, BOXES, SUPPORTS AND LABELING.
- DETAIL SCHEDULE ALL WORK AREAS FOR SHUT DOWNS AND RELOCATIONS MINIMUM TWO WEEKS IN ADVANCE. SEE ARCHITECTURAL PHASING PLAN AND PROVIDE CPM SCHEDULE TO COORDINATE WITH PHASING.
- EXISTING FIRE ALARM SYSTEM IN WORK AREAS SHALL STAY ACTIVE THROUGHOUT PROJECT. SHUTDOWNS FOR WORK THE THE SYSTEM SHALL BE SCHEDULED WITH THE VA TWO WEEKS IN ADVANCE AND THE SYSTEM RESTORED TO SERVICE AT THE END OF EACH WORK DAY IN ACCORDANCE WITH NFPA 241.
- REMOVE BLANKED OFF JUNCTION BOXES AND WALL BOXES AND UNUSED RACEWAY IN WALLS TO BE DEMOLISHED.

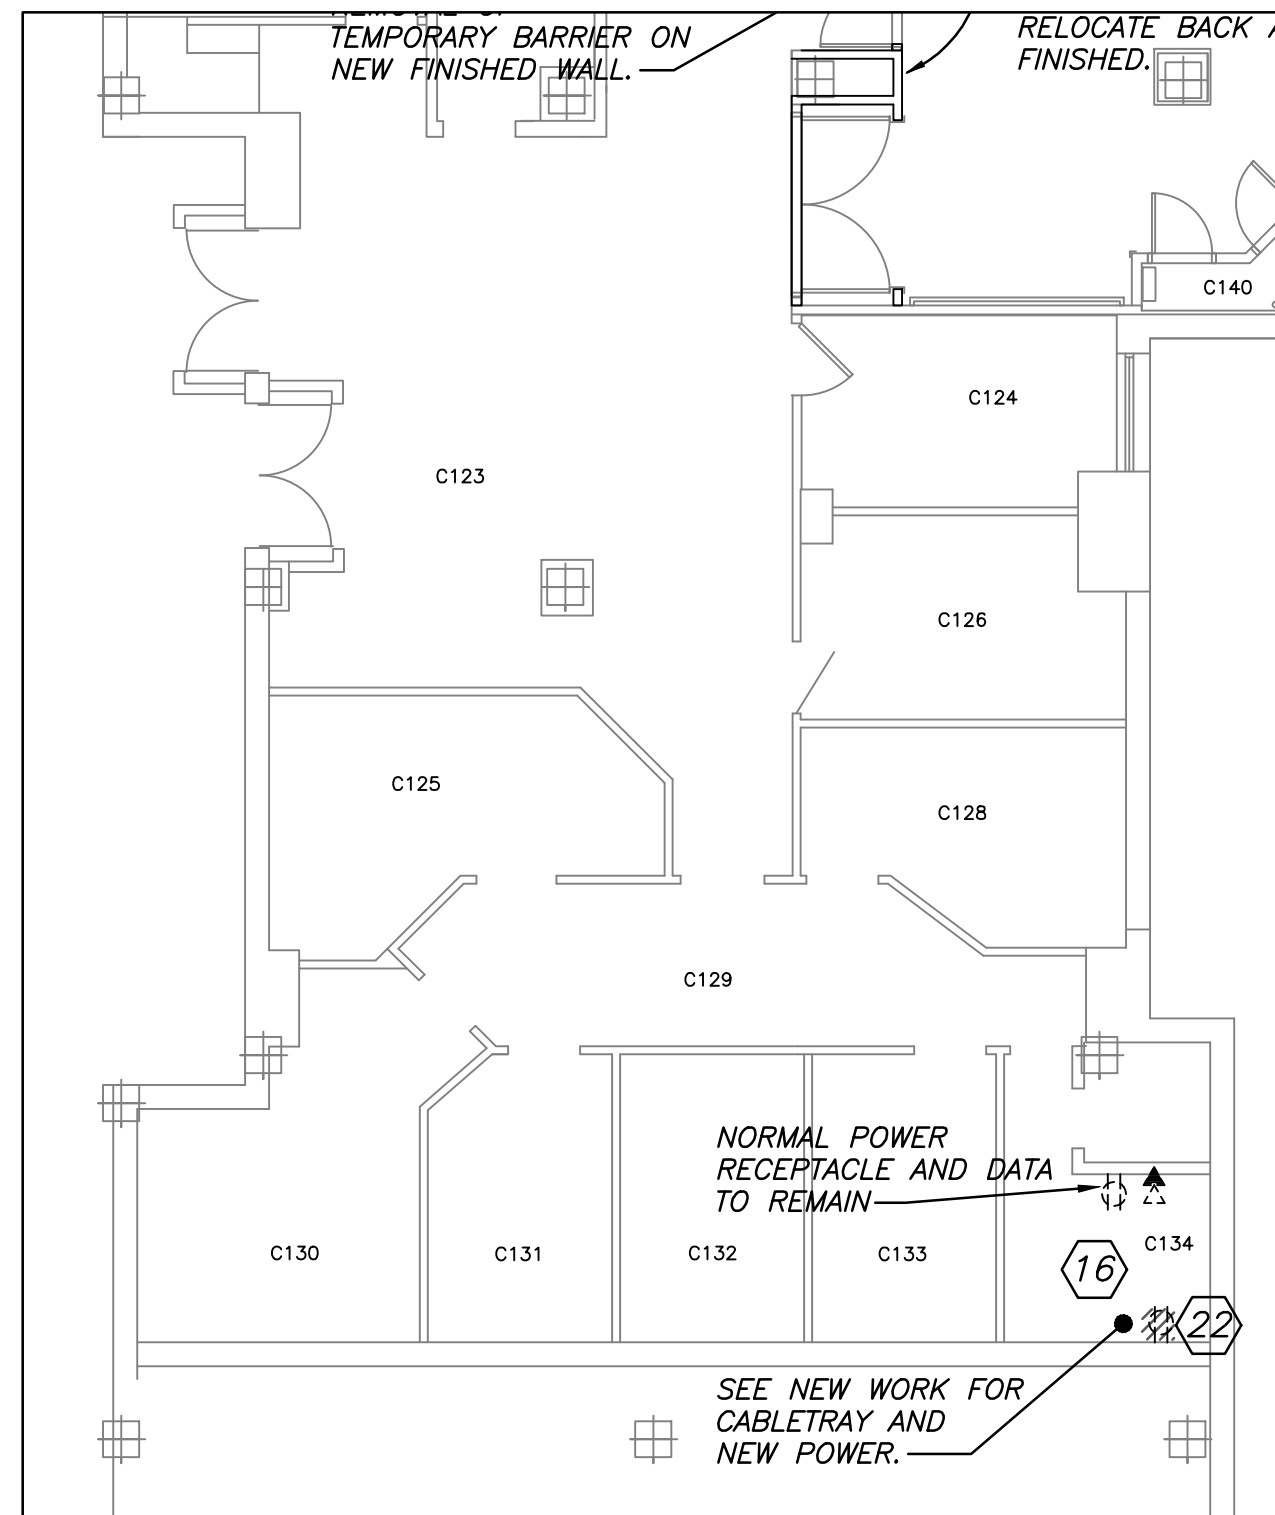

**3 DE2 ELECTRICAL DEMOLITION PARTIAL PLAN**  
SCALE: 1/8" = 1'-0"

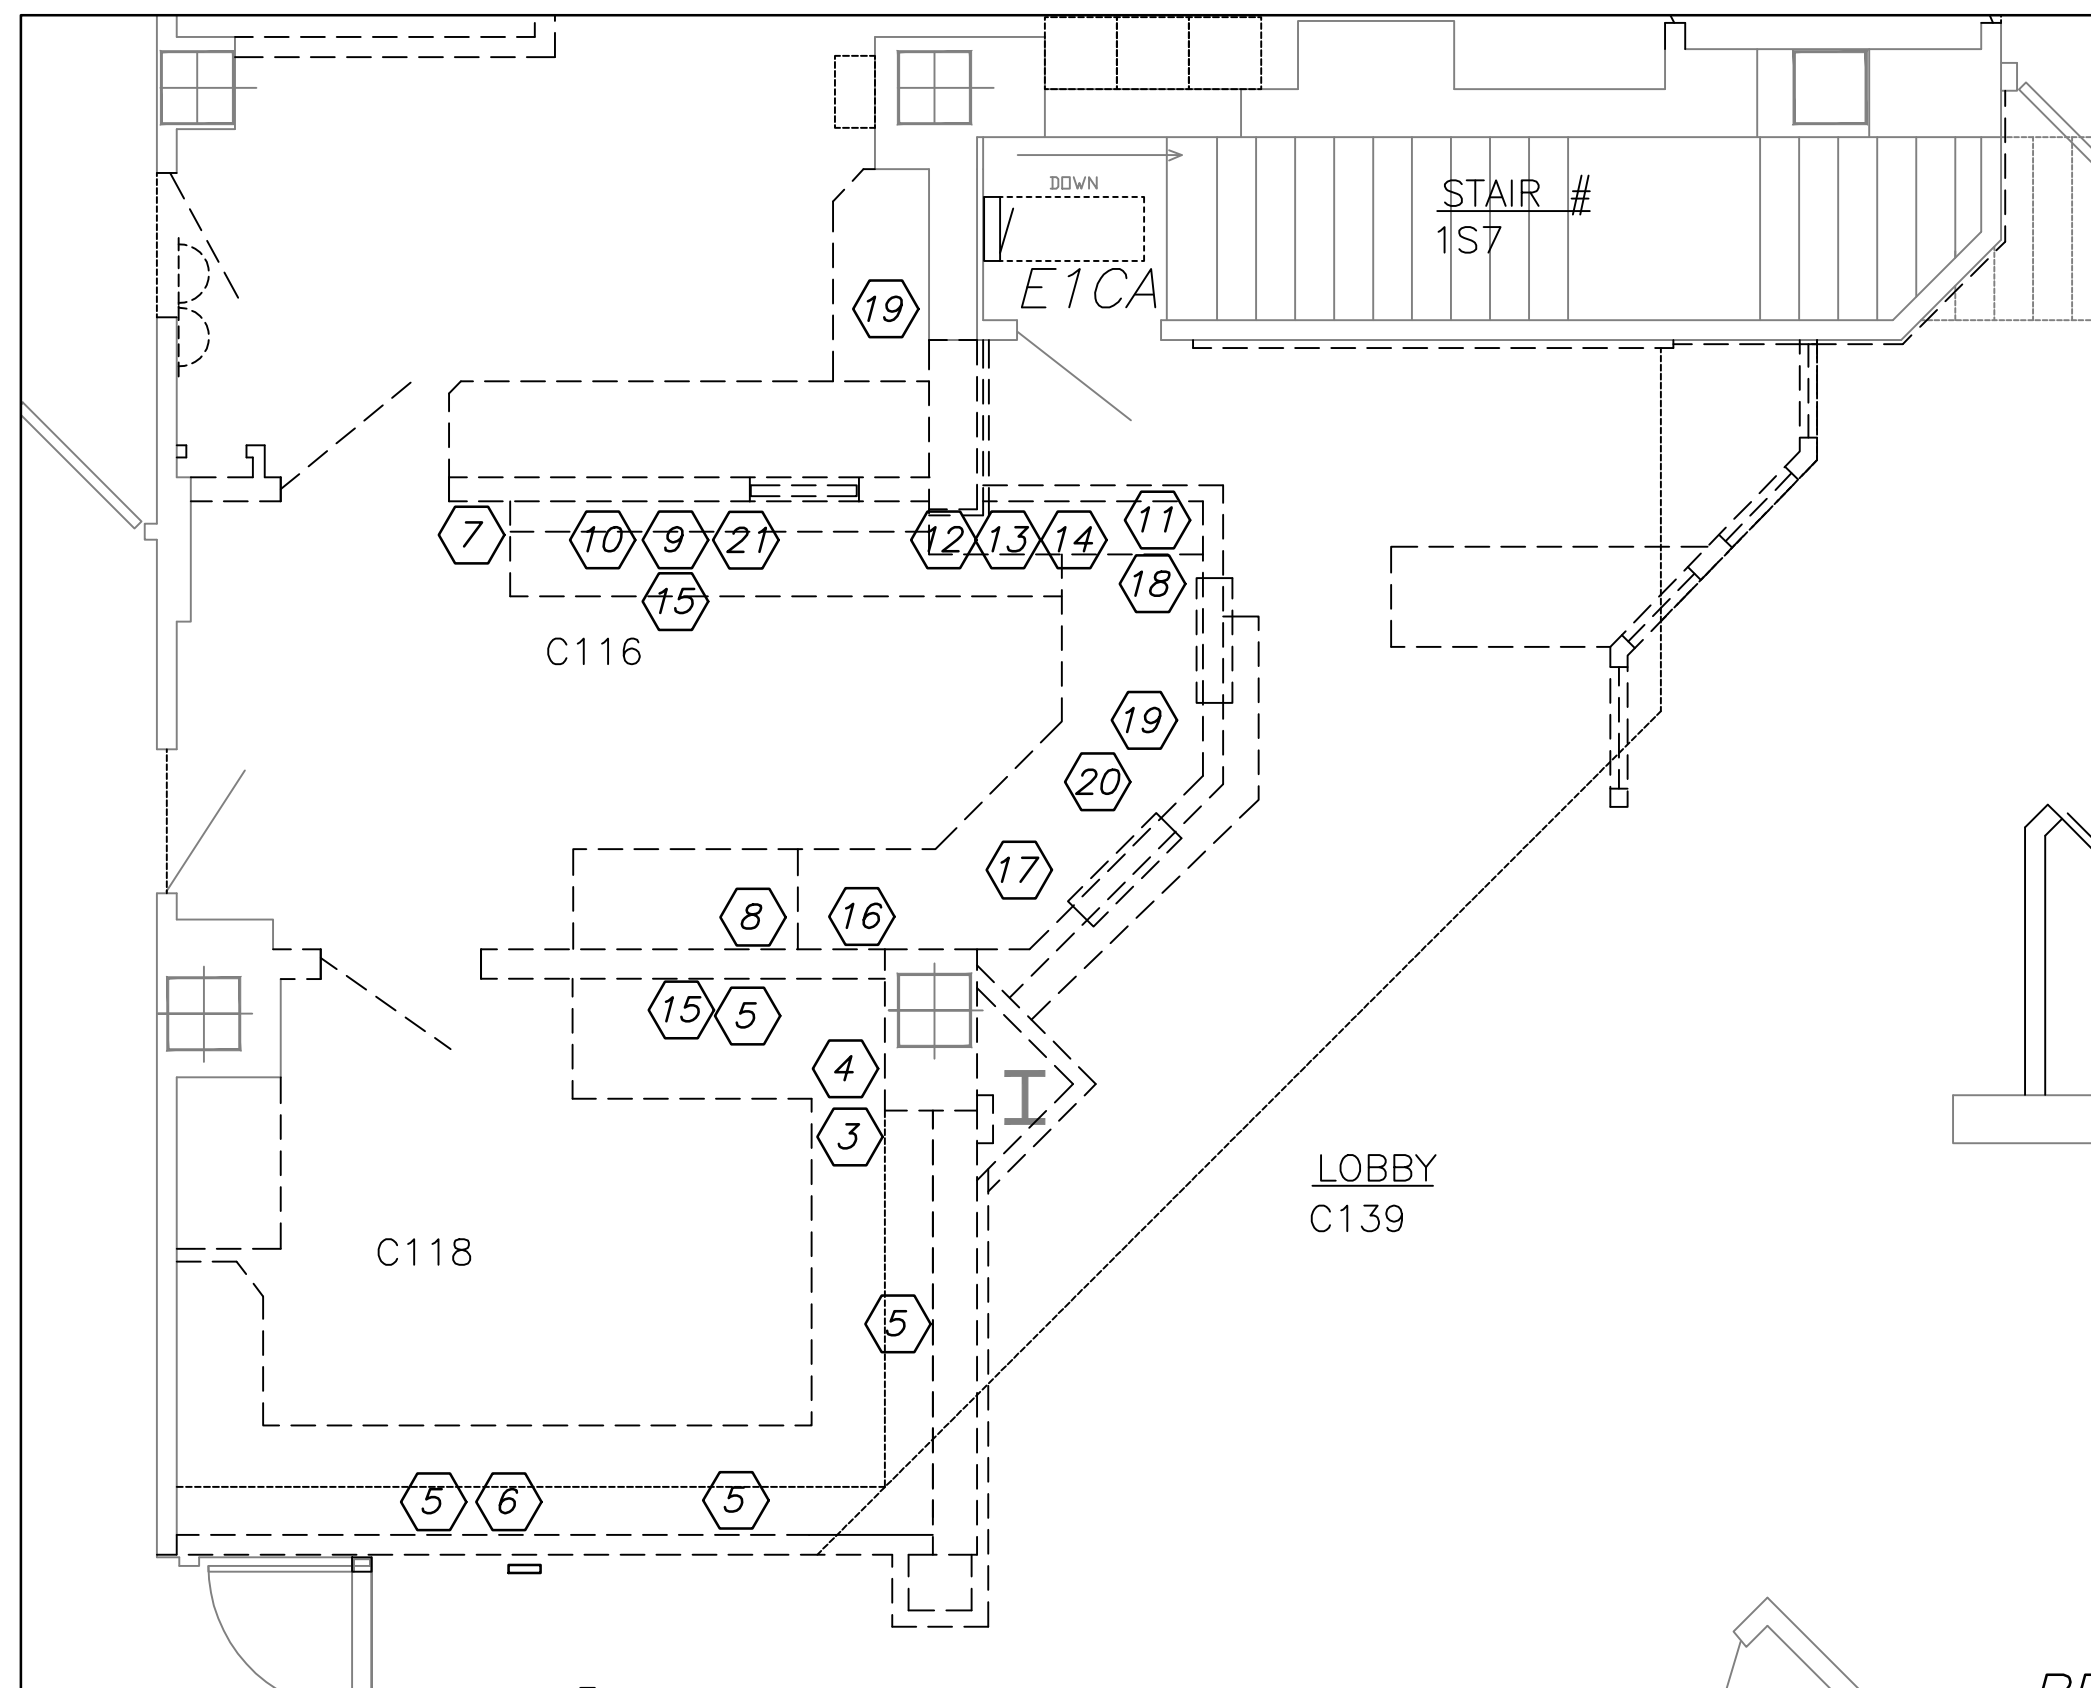

**2 DE2 ENLARGED ELECTRICAL DEMOLITION PLAN**  
SCALE: 1/4" = 1'-0"

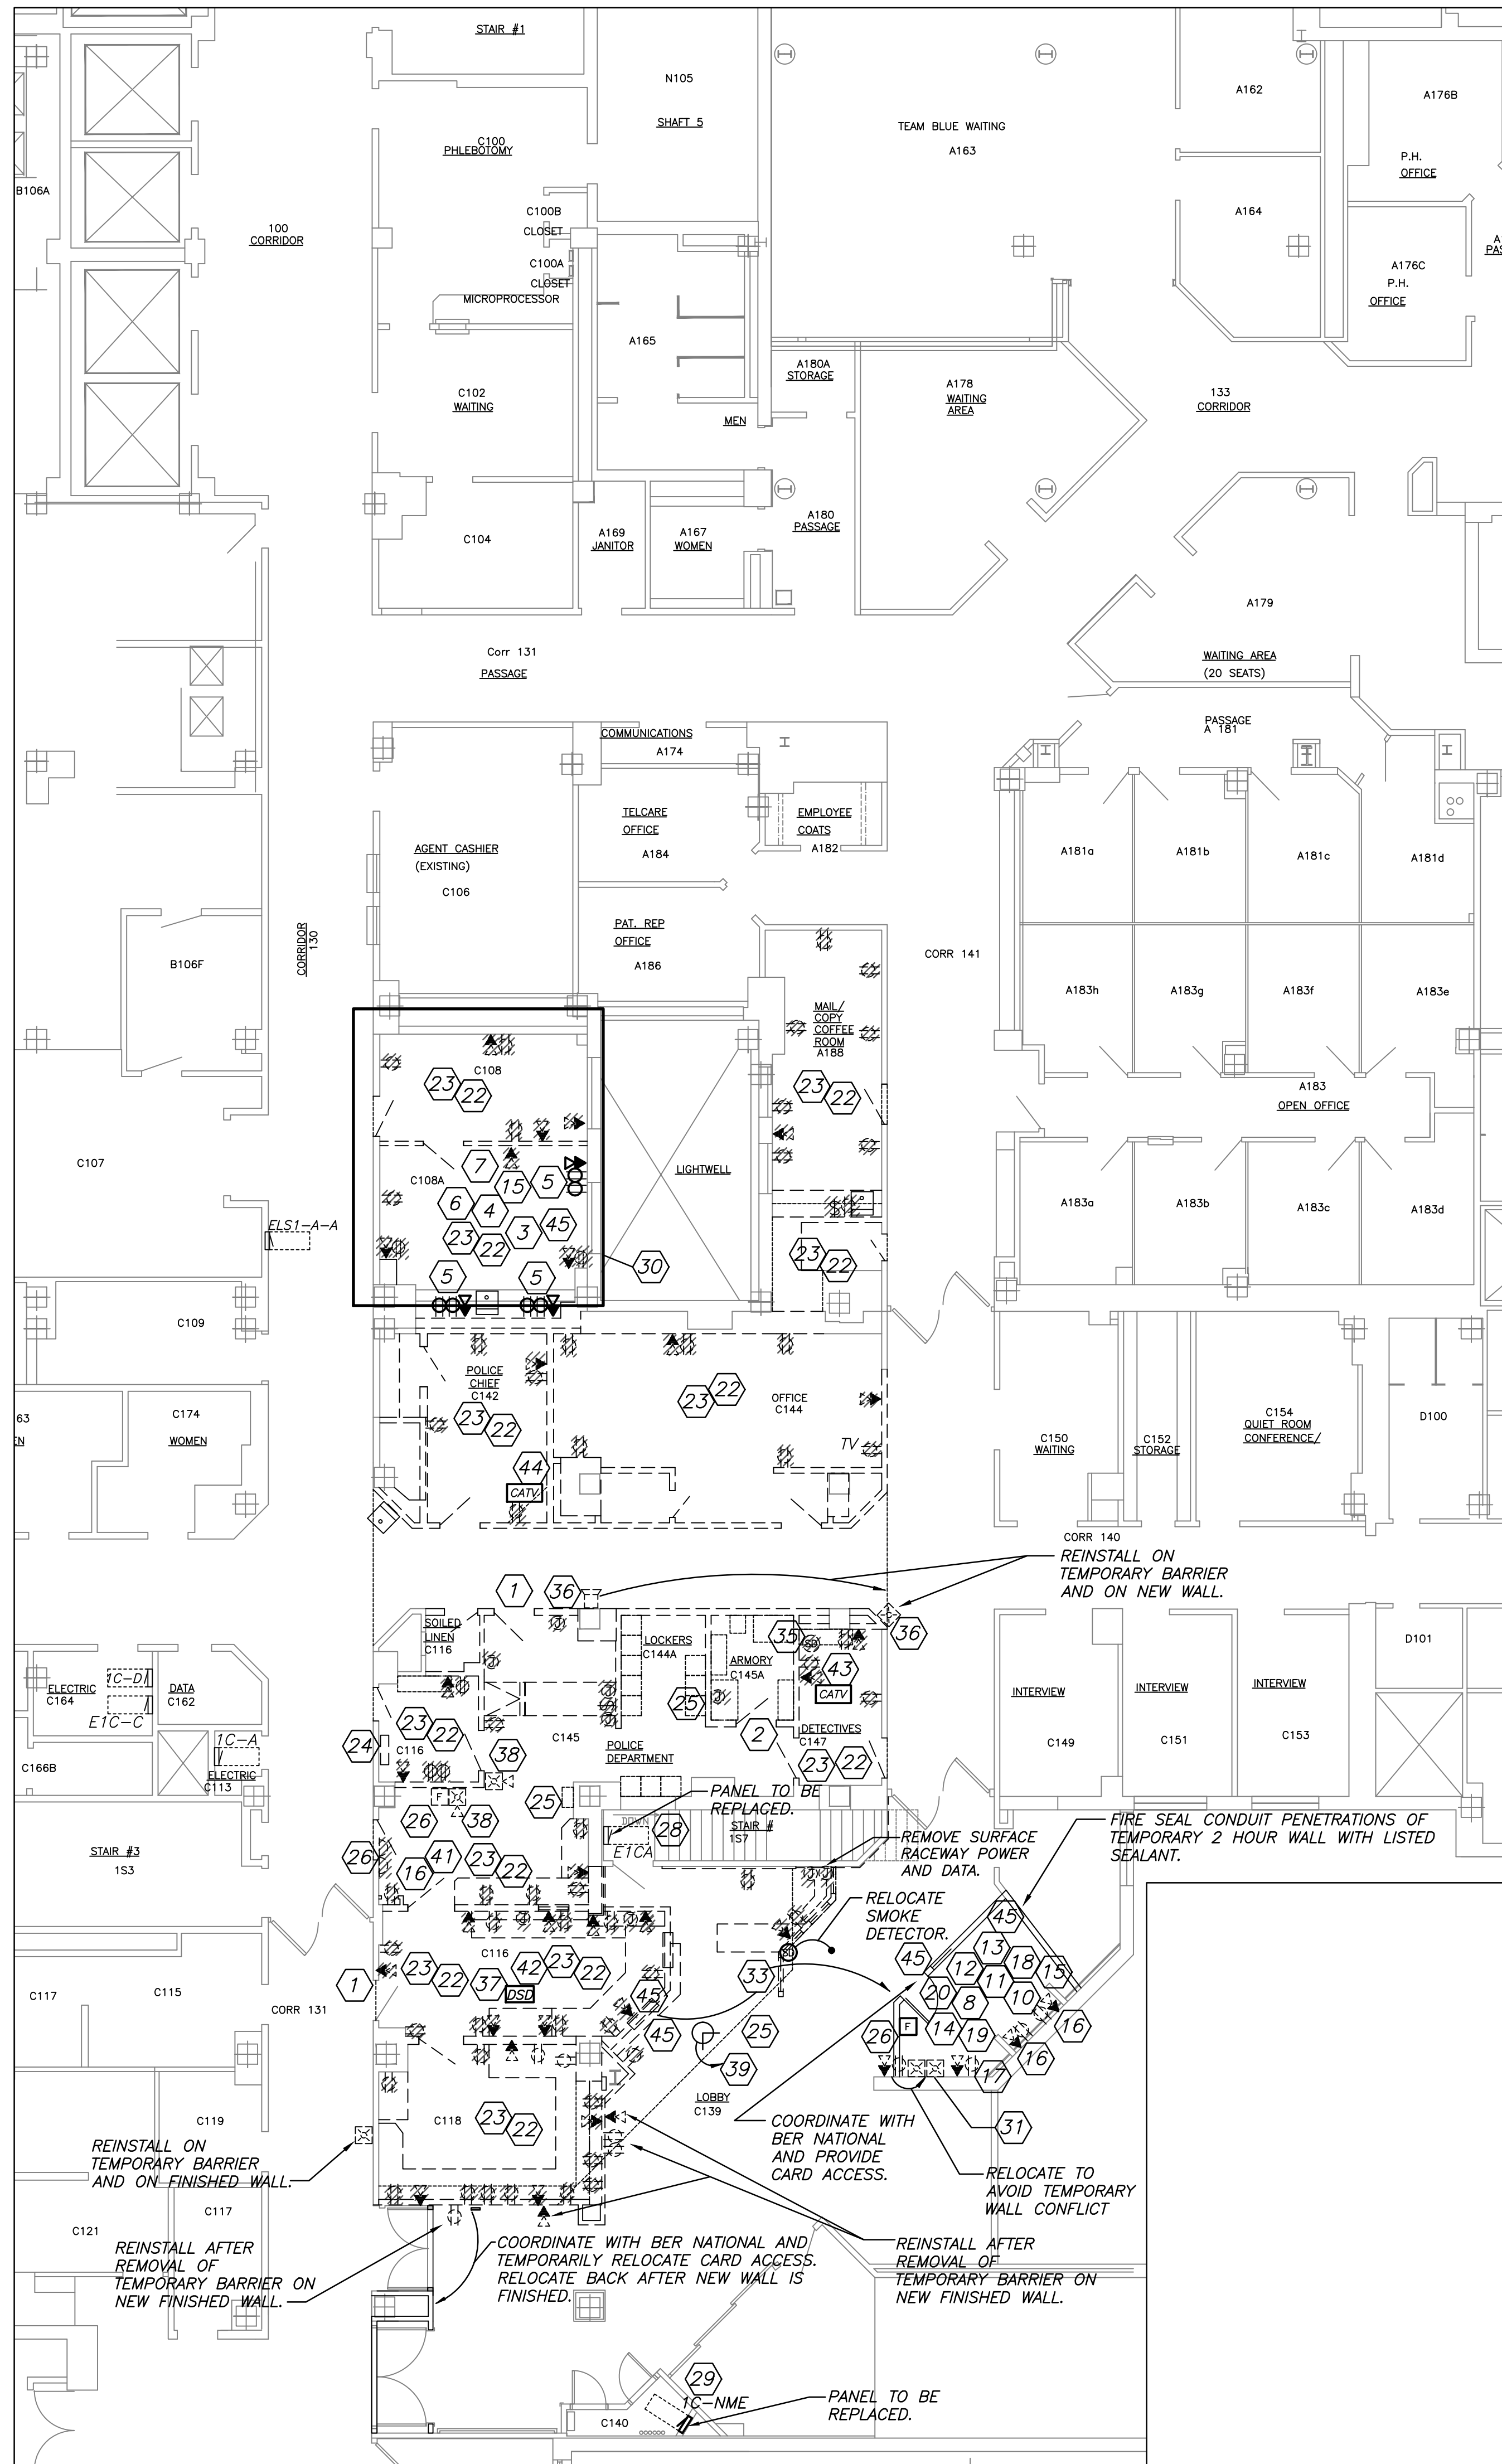


**1 DE2 ELECTRICAL DEMOLITION PARTIAL PLAN**  
SCALE: 1/8" = 1'-0"

# KEYED DRAWING NOTES:


- COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND REMOVE DOOR READER, DOOR STRIKE, REQUEST TO EXIT AND DOOR CONTACT.
- REMOVE ACTIVE ARMORY DOOR CONTACT, KEY PAD AND DOOR ALARM, KEYPAD, ARMED/DISARMED INDICATOR, DOOR STRIKE AND DOOR CONTACT. COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND REMOVE RELATED DEVICES.
- REMOVE EMERGENCY PHONE AND PROVIDE CAT 6 PHONE CABLE TO NEW LOCATION FROM DATA CLOSET C162. PROVIDE CABLE AND JACK TO TEMPORARY OPERATOR ROOM LOCATION WHILE CONSTRUCTION OCCURS. SEE PHASING PLAN. REVIEW DATA CLOSET WORK WITH VA I.T. DEPARTMENT BEFORE STARTING WORK.
- COORDINATE WITH AUTHORIZED RADIO SERVICE CONTRACTOR RADIO AND REMOVE WALL RADIO HAND SET AND CABLES. PROVIDE NEW HAND SET CABLE TO NEW OPERATOR'S ROOM. WORK TO BE COMPLETED BY A TECHNICIAN FROM RADIO SERVICE CONTRACTOR. PROVIDE CABLE AND JACK TO TEMPORARY OPERATOR ROOM WHILE CONSTRUCTION OCCURS. SEE PHASING PLAN. REVIEW WORK WITH RADIO SERVICE CONTRACTOR BEFORE STARTING WORK.
- REMOVE OPERATOR TELEPHONE/COMPUTER STATION POWER, TELEPHONE, DATA PUBLIC ADDRESS AND SURFACE RACEWAY. PROVIDE NEW POWER, TELEPHONE AND DATA LINES TO NEW LOCATION. PROVIDE PA CABLE FROM EXISTING BASE STATION IN BASEMENT. PROVIDE CAT 6 TELEPHONE AND DATA CABLES FROM CLOSET C162. PROVIDE CABLES AND JACKS TO TEMPORARY OPERATOR ROOM LOCATION WHILE CONSTRUCTION OCCURS. SEE PHASING PLAN. REVIEW DATA CLOSET WORK WITH VA I.T. DEPARTMENT BEFORE STARTING WORK. EXTEND EXISTING EMERGENCY POWER AND RECEPTACLE CIRCUITS AND RELOCATE SURFACE RACEWAY FROM EXISTING LOCATION TO TEMPORARY LOCATION. TRIM RACEWAY AS REQUIRED. REMOVE ALL POWER, DATA/TEL AND PA FROM TEMPORARY AREA AFTER OPERATORS ARE MOVED TO NEW AREA.
- RELOCATE PA ALARM ANNUNCIATOR FOR S.C.I. BUILDING TO TEMPORARY OPERATORS ROOM AND THEN RELOCATE FROM TEMPORARY AREA AFTER OPERATORS ARE MOVED TO NEW AREA. PROVIDE CABLE SOURCE FROM PA BASE CABINET IN BASEMENT.
- COORDINATE WITH AUTHORIZED RADIO SERVICE CONTRACTOR AND REMOVE THREE WALL MOUNTED ZETRON ALARM PANELS AND CABLES. PROVIDE NEW CABLES TO NEW LOCATION FROM SOURCE. WORK TO BE COMPLETED BY A TECHNICIAN FROM RADIO SERVICE CONTRACTOR. PROVIDE CABLES TO TEMPORARY OPERATOR ROOM LOCATION WHILE CONSTRUCTION OCCURS. SEE PHASING PLAN. REVIEW WORK WITH RADIO SERVICE CONTRACTOR BEFORE STARTING WORK. EXTEND EXISTING EMERGENCY POWER AND RECEPTACLE CIRCUITS AND RELOCATE FROM EXISTING LOCATION TO TEMPORARY LOCATION. REMOVE ALL POWER FROM TEMPORARY AREA AFTER DISPATCHERS ARE MOVED TO NEW AREA.
- COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND RELOCATE GARAGE INTERCOM CONTROL STATION TO TEMPORARY DISPATCH AREA. RELOCATE TO NEW DISPATCH ROOM AFTER NEW CONSTRUCTION. WORK TO BE AS APPROVED BY A TECHNICIAN FROM SECURITY SERVICE CONTRACTOR. SEE PHASING PLAN. REVIEW WORK WITH SECURITY SERVICE CONTRACTOR BEFORE STARTING WORK.
- RETAIN AN AUTHORIZED SERVICE TECHNICIAN AND REMOVE UPS ALARM ANNUNCIATOR. TEMPORARY STORE UNIT UNTIL NEW AREA IS CONSTRUCTED AND REINSTALL. WORK TO BE COMPLETED BY AUTHORIZED EQUIPMENT SERVICE CONTRACTOR.
- COORDINATE WITH AUTHORIZED RADIO SERVICE CONTRACTOR AND REMOVE COUNTY RADIO SET AND ANTENNAE CABLE. RELOCATE COUNTY RADIO SET TO NEW LOCATION FROM SOURCE. WORK TO BE COMPLETED BY A TECHNICIAN FROM RADIO SERVICE CONTRACTOR. PROVIDE CABLE AND JACK TO TEMPORARY DISPATCH ROOM LOCATION WHILE CONSTRUCTION OCCURS. SEE PHASING PLAN. REVIEW WORK WITH RADIO SERVICE CONTRACTOR BEFORE STARTING WORK. EXTEND EXISTING EMERGENCY POWER AND RECEPTACLE CIRCUIT AND RELOCATE FROM EXISTING LOCATION TO TEMPORARY LOCATION. REMOVE ALL POWER FROM TEMPORARY AREA AFTER DISPATCHERS ARE MOVED TO NEW AREA.
- COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND RELOCATE GATE ENTRY INTERCOM STATIONS TO TEMPORARY DISPATCH AREA. RELOCATE TO NEW DISPATCH ROOM AFTER NEW CONSTRUCTION. WORK TO BE AS APPROVED BY A TECHNICIAN FROM SECURITY SERVICE CONTRACTOR. SEE PHASING PLAN. REVIEW WORK WITH SECURITY SERVICE CONTRACTOR BEFORE STARTING WORK.
- COORDINATE WITH AUTHORIZED FIRE ALARM SERVICE CONTRACTOR AND RELOCATE FIRE ALARM REMOTE ANNUNCIATOR TO TEMPORARY DISPATCH AREA. RELOCATE TO NEW DISPATCH ROOM AFTER NEW CONSTRUCTION. WORK TO BE COMPLETED BY AN AUTHORIZED MEDGAS SERVICE CONTRACTOR TECHNICIAN. SEE PHASING PLAN.
- COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND RELOCATE LOBBY DOOR NIGHT SWITCH TO TEMPORARY DISPATCH AREA. RELOCATE TO NEW DISPATCH ROOM AFTER NEW CONSTRUCTION. WORK TO BE AS APPROVED BY A TECHNICIAN FROM SECURITY SERVICE CONTRACTOR. SEE PHASING PLAN. REVIEW WORK WITH SECURITY SERVICE CONTRACTOR BEFORE STARTING WORK.
- COORDINATE WITH AUTHORIZED MEDGAS SERVICE CONTRACTOR AND RELOCATE MEDGAS ALARM REMOTE ANNUNCIATOR TO TEMPORARY DISPATCH AREA. RELOCATE TO NEW DISPATCH ROOM AFTER NEW CONSTRUCTION. WORK TO BE COMPLETED BY AN AUTHORIZED MEDGAS SERVICE CONTRACTOR TECHNICIAN. SEE PHASING PLAN.
- COORDINATE WITH AUTHORIZED SERVICE CONTRACTOR AND RELOCATE CODE BLUE NURSE CALL ALARM ANNUNCIATOR FROM OPERATOR AND DISPATCH AREAS. RELOCATE TO TEMPORARY AREAS, THEN LOCATE IN NEW AREAS AFTER OPERATORS AND DISPATCHERS MOVE. SEE PHASING PLAN.
- COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND RELOCATE CCTV IT ROOM, AND RELOCATE TABLETOP CONTROLLER AND TWO MONITORS TO TEMPORARY DISPATCH AREA. RELOCATE TO NEW DISPATCH ROOM AFTER NEW CONSTRUCTION. WORK TO BE AS APPROVED BY A TECHNICIAN FROM RADIO SERVICE CONTRACTOR. SEE PHASING PLAN. REVIEW WORK WITH RADIO SERVICE CONTRACTOR BEFORE STARTING WORK. EXTEND EXISTING EMERGENCY POWER AND RECEPTACLE CIRCUITS AND RELOCATE FROM EXISTING LOCATION TO TEMPORARY LOCATION. REMOVE AND RESTORE ALL POWER FROM TEMPORARY AREA AFTER DISPATCHERS ARE MOVED TO NEW AREA. REMOVE TEMPORARY MONITORS AND TURN OVER TO VA.
- COORDINATE WITH AUTHORIZED RADIO SERVICE CONTRACTOR AND RELOCATE RADIO COMPUTER AND AUDIO BOX TO TEMPORARY DISPATCH ROOM. INSTALL AT EACH DISPATCH STATION IN NEW AREA AFTER CONSTRUCTION IS COMPLETE. WORK TO BE COMPLETED BY A TECHNICIAN FROM RADIO SERVICE CONTRACTOR. SEE PHASING PLAN. REVIEW WORK WITH RADIO SERVICE CONTRACTOR BEFORE STARTING WORK. EXTEND EXISTING EMERGENCY POWER AND RECEPTACLE CIRCUITS AND RELOCATE FROM EXISTING LOCATION TO TEMPORARY LOCATION. REMOVE ALL POWER FROM TEMPORARY AREA AFTER DISPATCHERS ARE MOVED TO NEW AREA. REMOVE DATA CABLE AND JACK. PROVIDE CAT 6 DATA CABLE TO NEW LOCATION FROM DEPARTMENT BEFORE STARTING WORK.
- REMOVE DATA/TEL DROP FROM VA COMPUTER. PROVIDE CAT 6 DATA CABLES TO NEW DISPATCH ROOM FROM DATA CLOSET C162. PROVIDE CABLE AND JACK TO TEMPORARY DISPATCH ROOM LOCATION WHILE CONSTRUCTION OCCURS. SEE PHASING PLAN. REVIEW DATA CLOSET WORK WITH VA I.T. DEPARTMENT BEFORE STARTING WORK.
- RELOCATE PARKING GARAGE BOOTH DURESS ALARM TO TEMPORARY DISPATCH AREA AND THEN TO NEW DISPATCH AREA.
- REMOVE UNUSED POWER BACK TO SOURCE. SEE ENLARGED PLAN FOR RELOCATED POWER. REMOVE RECEPTABLES, SINGLE AND MULTI-GANG BOXES, POWER STRIPS AND SURFACE RACEWAY FROM DEMOLITIONED AREA AND DEMOLITIONED WALLS.
- REMOVE UNUSED DATA AND TELEPHONE BACK TO SOURCE IN C162 DATA CLOSET FROM DEMOLITIONED AREA AND DEMOLITIONED WALLS. SEE ENLARGED PLAN FOR RELOCATED CABLES. REVIEW TIPS CLOSET WORK WITH VA I.T. DEPARTMENT BEFORE STARTING WORK. REMOVE ALL EXISTING CABLE. DO NOT REUSE CABLE.
- REMOVE POWER DROP TO KEY WATCH CABINET.
- REMOVE ABANDONED ARMORY ALARM BEACON, ALARM PANEL AND WIRING.
- REMOVE FIRE ALARM MANUAL STATION AND ABANDONED BELLS. REINSTALL MANUAL STATION IN TEMPORARY AND PERMANENT DISPATCH AREAS.
- COORDINATE WITH AUTHORIZED DEALER BER NATIONAL AND RELOCATE PHOTO ID STATION COMPUTER AND CAMERA TO NEW AREA. WORK TO BE AS APPROVED BY A TECHNICIAN FROM BER NATIONAL. SEE PHASING PLAN. REVIEW WORK WITH BER NATIONAL BEFORE STARTING WORK. REMOVE EXISTING DATA AND PROVIDE CAT 6 CABLES TO NEW LOCATION FROM DATA CLOSET C174. REVIEW DATA CLOSET WORK WITH VA I.T. DEPARTMENT BEFORE STARTING WORK.
- EMERGENCY PANEL TO BE REPLACED BY THIS CONTRACTOR. LIFE SAFETY 70A FEEDER PREVIOUSLY INSTALLED BY THE VA FROM LIFE SAFETY SYSTEM. REMOVE 2P-20 RECEPTACLE BELOW PANEL.
- PANEL TO BE USED FOR NORMAL POWER SOURCE TO NEW WORK. REPLACE EXISTING 30-POLE PANEL WITH NEW 42-POLE PANEL. EXISTING PANEL IS 225A, 22KVA, 120/208V/34/4-WIRE WITH 225A MCB.
- EXISTING ROOMS 108 AND 108A TO BE USED AS TEMPORARY OPERATOR ROOM. PROVIDE THREE QUAD RECEPTABLES FROM EMERGENCY POWER PANEL E1C-C OR RELOCATE EXISTING EMERGENCY POWER CIRCUITS. PROVIDE THREE DATA/TEL DROPS FROM DATA CLOSET C162. REMOVE ALL POWER AND DATA/TEL AFTER OPERATORS ARE MOVED.
- RELOCATE TWO FIRE ALARMS TO OUTSIDE TEMPORARY DISPATCH AREA. DO NOT MOUNT ON TEMPORARY WALLS.
- COORDINATE OFF-HOURS WORK AND RELOCATE ONE OF TWO FBI DEDICATED PHONE LINES FOR FINGERPRINT COMPUTERS TO LOCATION INDICATED. LINES ORIGINATE IN DATA ROOM A174.
- RELOCATE CLOCK TO TEMP DISPATCH WINDOW, THEN INSTALL ABOVE NEW DISPATCH WINDOW.
- REMOVE RECEPTABLES AND DATA/TEL DROPS FROM WALL TO BE REMOVED. RECONNECT POWER TO NEW QUAD SHOWN ON NEW WORK PLAN.
- REMOVE SMOKE DETECTOR.
- REMOVE FIRE ALARM ANNUNCIATORS. SAVE FOR REUSE IN RENOVATED AREA.
- PERMANENTLY REMOVE DUCT SMOKE DAMPER AND DUCT DETECTOR.
- BUILDING 2 AND BUILDING 1 FIRE ALARM ANNUNCIATORS TO BE RELOCATED TO RENOVATED AREA.
- COORDINATE WITH BER-NATIONAL AND RELOCATE CEILING MOUNT CAMERA TO AVOID CONFLICT WITH NEW WALL.
- RELOCATE EXISTING CATV TO NEW TRAINING ROOM.
- EXISTING CATV R68 CABLE IS COILED ABOVE CEILING NEAR EXISTING CCTV RACKS. EXTEND CABLE TO NEW ROLL CALL ROOM.
- EXISTING CATV R68 CABLE IS COILED ABOVE CEILING NEAR DISPATCH AREA. EXTEND TO NEW DISPATCH ROOM TV.
- RELOCATE CATV DROP FROM EXISTING INVESTIGATORS OFFICE TO NEW INVESTIGATORS OFFICE.
- RELOCATE EXISTING CATV DROP IN CHIEF'S OFFICE TO NEW CHIEF'S OFFICE. PROVIDE SUPPORT AND ADD NEW DROP TO DEPUTY CHIEF'S OFFICE.
- REMOVE EXISTING DISPATCH WINDOW INTERCOM. RELOCATE FOR OPERATION BETWEEN TEMPORARY OPERATORS ROOM AND TEMPORARY DISPATCH ROOM. PROVIDE ALL REQUIRED WIRING, MASTER STATIONS AND LABOR AS APPROVED BY AUTHORIZED SECURITY SERVICE CONTRACTOR. REMOVE SYSTEM AFTER TEMPORARY ROOMS ARE DEMOLISHED AND TURN OVER TO VA.
- COORDINATE WITH AUTHORIZED SECURITY SERVICE CONTRACTOR AND PROVIDE NEW CUSTOMER WINDOW UPPHONE INTERCOM SYSTEM FOR TEMPORARY DISPATCH AND FOR RELOCATION TO NEW DISPATCH AREA. PROVIDE CUSTOMER SIDE SUBSTATION HAND SET (S-RS) AT WINDOW AND TWO MASTER STATIONS (S-MV) (ONE IS FOR NEW AREA) FOR USE AT DISPATCH WORKSTATIONS. PROVIDE CATS FROM EACH STATION TO A CENTRAL CONTROLLER IN THE CCTV IT RACK. PROVIDE ALL WIRING AND INSTALLATION AS APPROVED BY SECURITY SERVICE CONTRACTOR.

REVISIONS	DATE
REVISED PER VA COMMENTS DWGS DM1, M1, DE2, E1	6-27-13

## SUB-CONSULTANTS:



**Engineering and  
Land Surveying, P.C.**  
1533 Crescent Road - Clifton Park, NY 12065

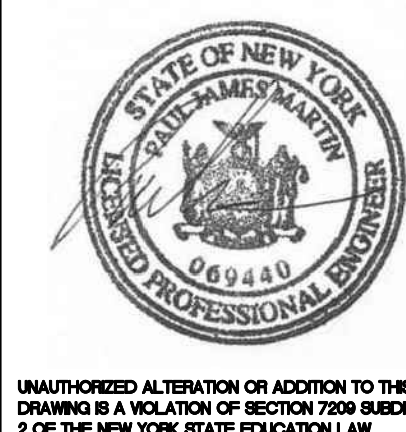

## PREPARED BY:

**Sigma Psi Consulting**  
Mechanical, Electrical, Plumbing Engineers, PLLC  
4 Collamer Road, Malta, NY 12020 PH (518) 581-9428 FX (518) 580-9325

## Drawing Title

ELECTRICAL DEMOLITION PLANS

## Approved Project Director

## Project Title

**SYRACUSE VAMC  
RENOVATE POLICE STATION**

## Location

SYRACUSE VA MEDICAL CENTER NY

## Date

4/19/13

## Checked

- PJM

## Drawn

- PJM

Project Number  
528A7-12-708

Building Number  
1

Drawing Number  
DE2

Dwg 26 of 31

Office of  
Construction  
and Facilities  
Management

