



DEMOLITION PLAN
ARCH. SCALE: 1/4" = 1'-0"
ENG. SCALE: 1" = 4'-0"



- DEMOLITION PLAN NOTES:**
- 1 DEMOLISH AND REMOVE EXISTING ROOFING ASSEMBLY IN IT'S ENTIRETY DOWN TO EXISTING CONCRETE DECK SLAB.
 - 2 DEMOLISH AND REMOVE EXISTING FAN CURB AND CURB COVER COMPLETE.
 - 3 DEMOLISH AND REMOVE EXISTING MASONRY PARAPET, STONE PARAPET CAP COMPLETE DOWN TO EXISTING CONCRETE DECK SLAB.
 - 4 DEMOLISH AND REMOVE EXISTING WINDOW UNIT AND STONE SILL COMPLETE.
 - 5 DEMOLISH AND REMOVE PORTION OF EXISTING MASONRY WALL, INCLUDING WALL UNDER REMOVED WINDOW, DOWN TO EXISTING CONCRETE SLAB.
 - 6 EXISTING PLUMBING VENT PIPE TO REMAIN, REMOVE ALL ASSOCIATED FLASHING.
 - 7 EXISTING ROOF DRAIN PIPE TO REMAIN, REMOVE EXISTING DRAIN COVER AND ASSOCIATED FLASHING.
 - 8 DEMOLISH AND REMOVE EXISTING ABANDONED SCUPPER ABOVE AND ALL ASSOCIATED ITEMS COMPLETE.
 - 9 DEMOLISH AND REMOVE EXISTING METAL FLASHING AND COUNTERFLASHING.
 - 10 DEMOLISH AND REMOVE EXISTING LIGHTNING PROTECTION RODS AND WIRES COMPLETE.

- GENERAL DEMOLITION NOTES:**
1. REMOVE ALL WALLS, AS SHOWN ON PLAN OR AS REQUIRED BY WORK. PROVIDE SUPPORT TO REMAINING PORTIONS OF WALLS AND CEILING SYSTEMS AS REQUIRED.
 2. REMOVE CEILINGS, SUSPENSION SYSTEMS, FRAMING AND FIXTURES AS SHOWN ON PLANS. PROVIDE REQUIRED TEMPORARY SUPPORT FOR ALL REMAINING UTILITIES.
 3. SURFACES REMAINING AFTER DEMOLITION SHALL BE THOROUGHLY CLEANED AND PREPARED TO RECEIVE THE INDICATED NEW FINISH AND/OR SYSTEMS IN ACCORDANCE WITH RECOMMENDED INDUSTRY STANDARDS PER SPECIFICATION SECTION 02 41 00.
 4. IN AREAS INDICATED TO RECEIVE NEW FINISHES, PREPARE SURFACE TO ACCEPT NEW FINISH ACCORDING TO MANUFACTURER'S RECOMMENDATIONS. REMOVE ALL ABANDONED DEVICES AND FASTENERS. SEAL ALL CRACKS, HOLES AND BLEMISHES TO MATCH EXISTING.
 5. REPORT DISCREPANCIES BETWEEN ACTUAL CONDITIONS AND CONTRACT DOCUMENTS TO THE COR. IN WRITING AND OBTAIN WRITTEN CLARIFICATION PRIOR TO COMMENCING WORK. ALL DIMENSIONS ARE TO BE FIELD VERIFIED.
 6. PROTECT EXISTING CONSTRUCTION AND FINISHES SCHEDULED TO REMAIN. REPAIR ANY DAMAGE TO EXISTING RESULTING FROM CONSTRUCTION ACTIVITIES ASSOCIATED WITH THIS PROJECT.
 7. PROVIDE SHORING AND BRACING AS REQUIRED TO MAINTAIN THE STRUCTURAL INTEGRITY OF EXISTING CONSTRUCTION TO REMAIN.
 8. PROPER EXHAUSTING AND VENTILATION OF WORK AREAS WILL BE PROVIDED BY THE CONTRACTOR.
 9. ICRA PERMITS WILL BE NEEDED FOR ALL AREAS.
 10. ALL DEMOLITION AND REMOVAL WORK SHALL BE COORDINATED WITH COR.
 11. DEMOLITION AND REMOVAL WORK SHALL BE STAGED TO MINIMIZE IMPACT TO VAMC OPERATIONS.
 12. DUST CONTROL SHALL BE INTEGRATED THROUGHOUT THE PROJECT.
 13. CONDUCT REMOVAL OPERATIONS TO PREVENT INJURY TO PEOPLE AND DAMAGE TO ADJACENT SURFACES AND AREAS.
 14. PROMPTLY DISPOSE OF DEMOLISHED MATERIALS. DO NOT ALLOW DEMOLISHED MATERIALS TO ACCUMULATE ON SITE.
 15. ITEMS NOTED FOR REMOVAL SHALL BE COMPLETELY REMOVED AND LEGALLY DISPOSED OF.
 16. RECYCLING AND SALVAGING SHALL BE COMPLETED. REFER TO SPECIFICATIONS FOR REQUIREMENTS.
 17. BEFORE ANY DEMOLITION WORK BEGINS, COMPLETE ASBESTOS ABATEMENT. REFER TO THE HA SERIES DRAWINGS.

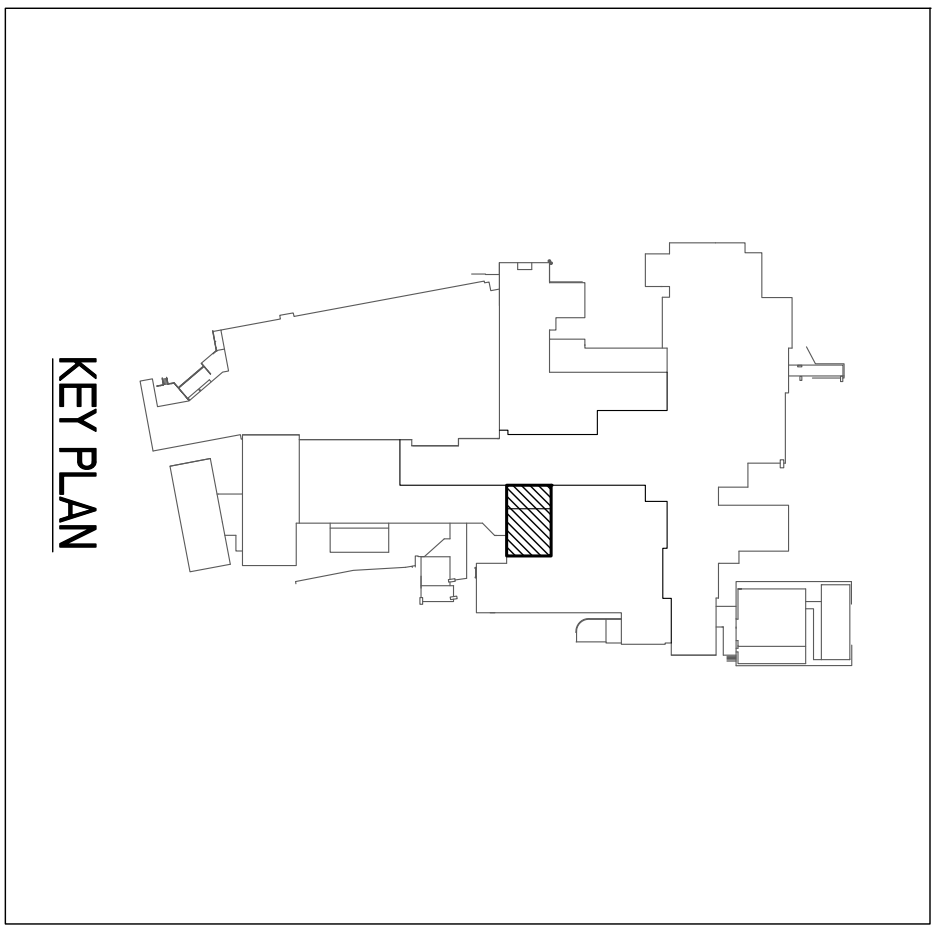

65% SUBMISSION - NOT FOR CONSTRUCTION

Revisions	Date


CONSULTANTS:



3610 LAWSON ROAD
JAMESTOWN, NEW YORK 14701
PHONE: (716) 484 - 1366
FAX: (716) 484 - 1519



ARCHITECT/ENGINEERS:



TOLMAN ENGINEERING, PLLC
3610 LAWSON ROAD
JAMESTOWN, NEW YORK 14701
PHONE: (716) 484 - 1366
FAX: (716) 484 - 1519

Drawing Title
PARTIAL 8TH FLOOR
DEMOLITION PLAN

Approved Project Director

Project Title
CLC OUTDOOR LIVING SPACE

Project Number
528A7-14-710
Building Number
1

Location
STRACUSE VAMC

Date
05-22-2015

Checked
LLJ/JP

Drawn
EHAL/JU

Drawing Number
AD-100
Dwg. X of X

Office of
Construction
and Facilities
Management

