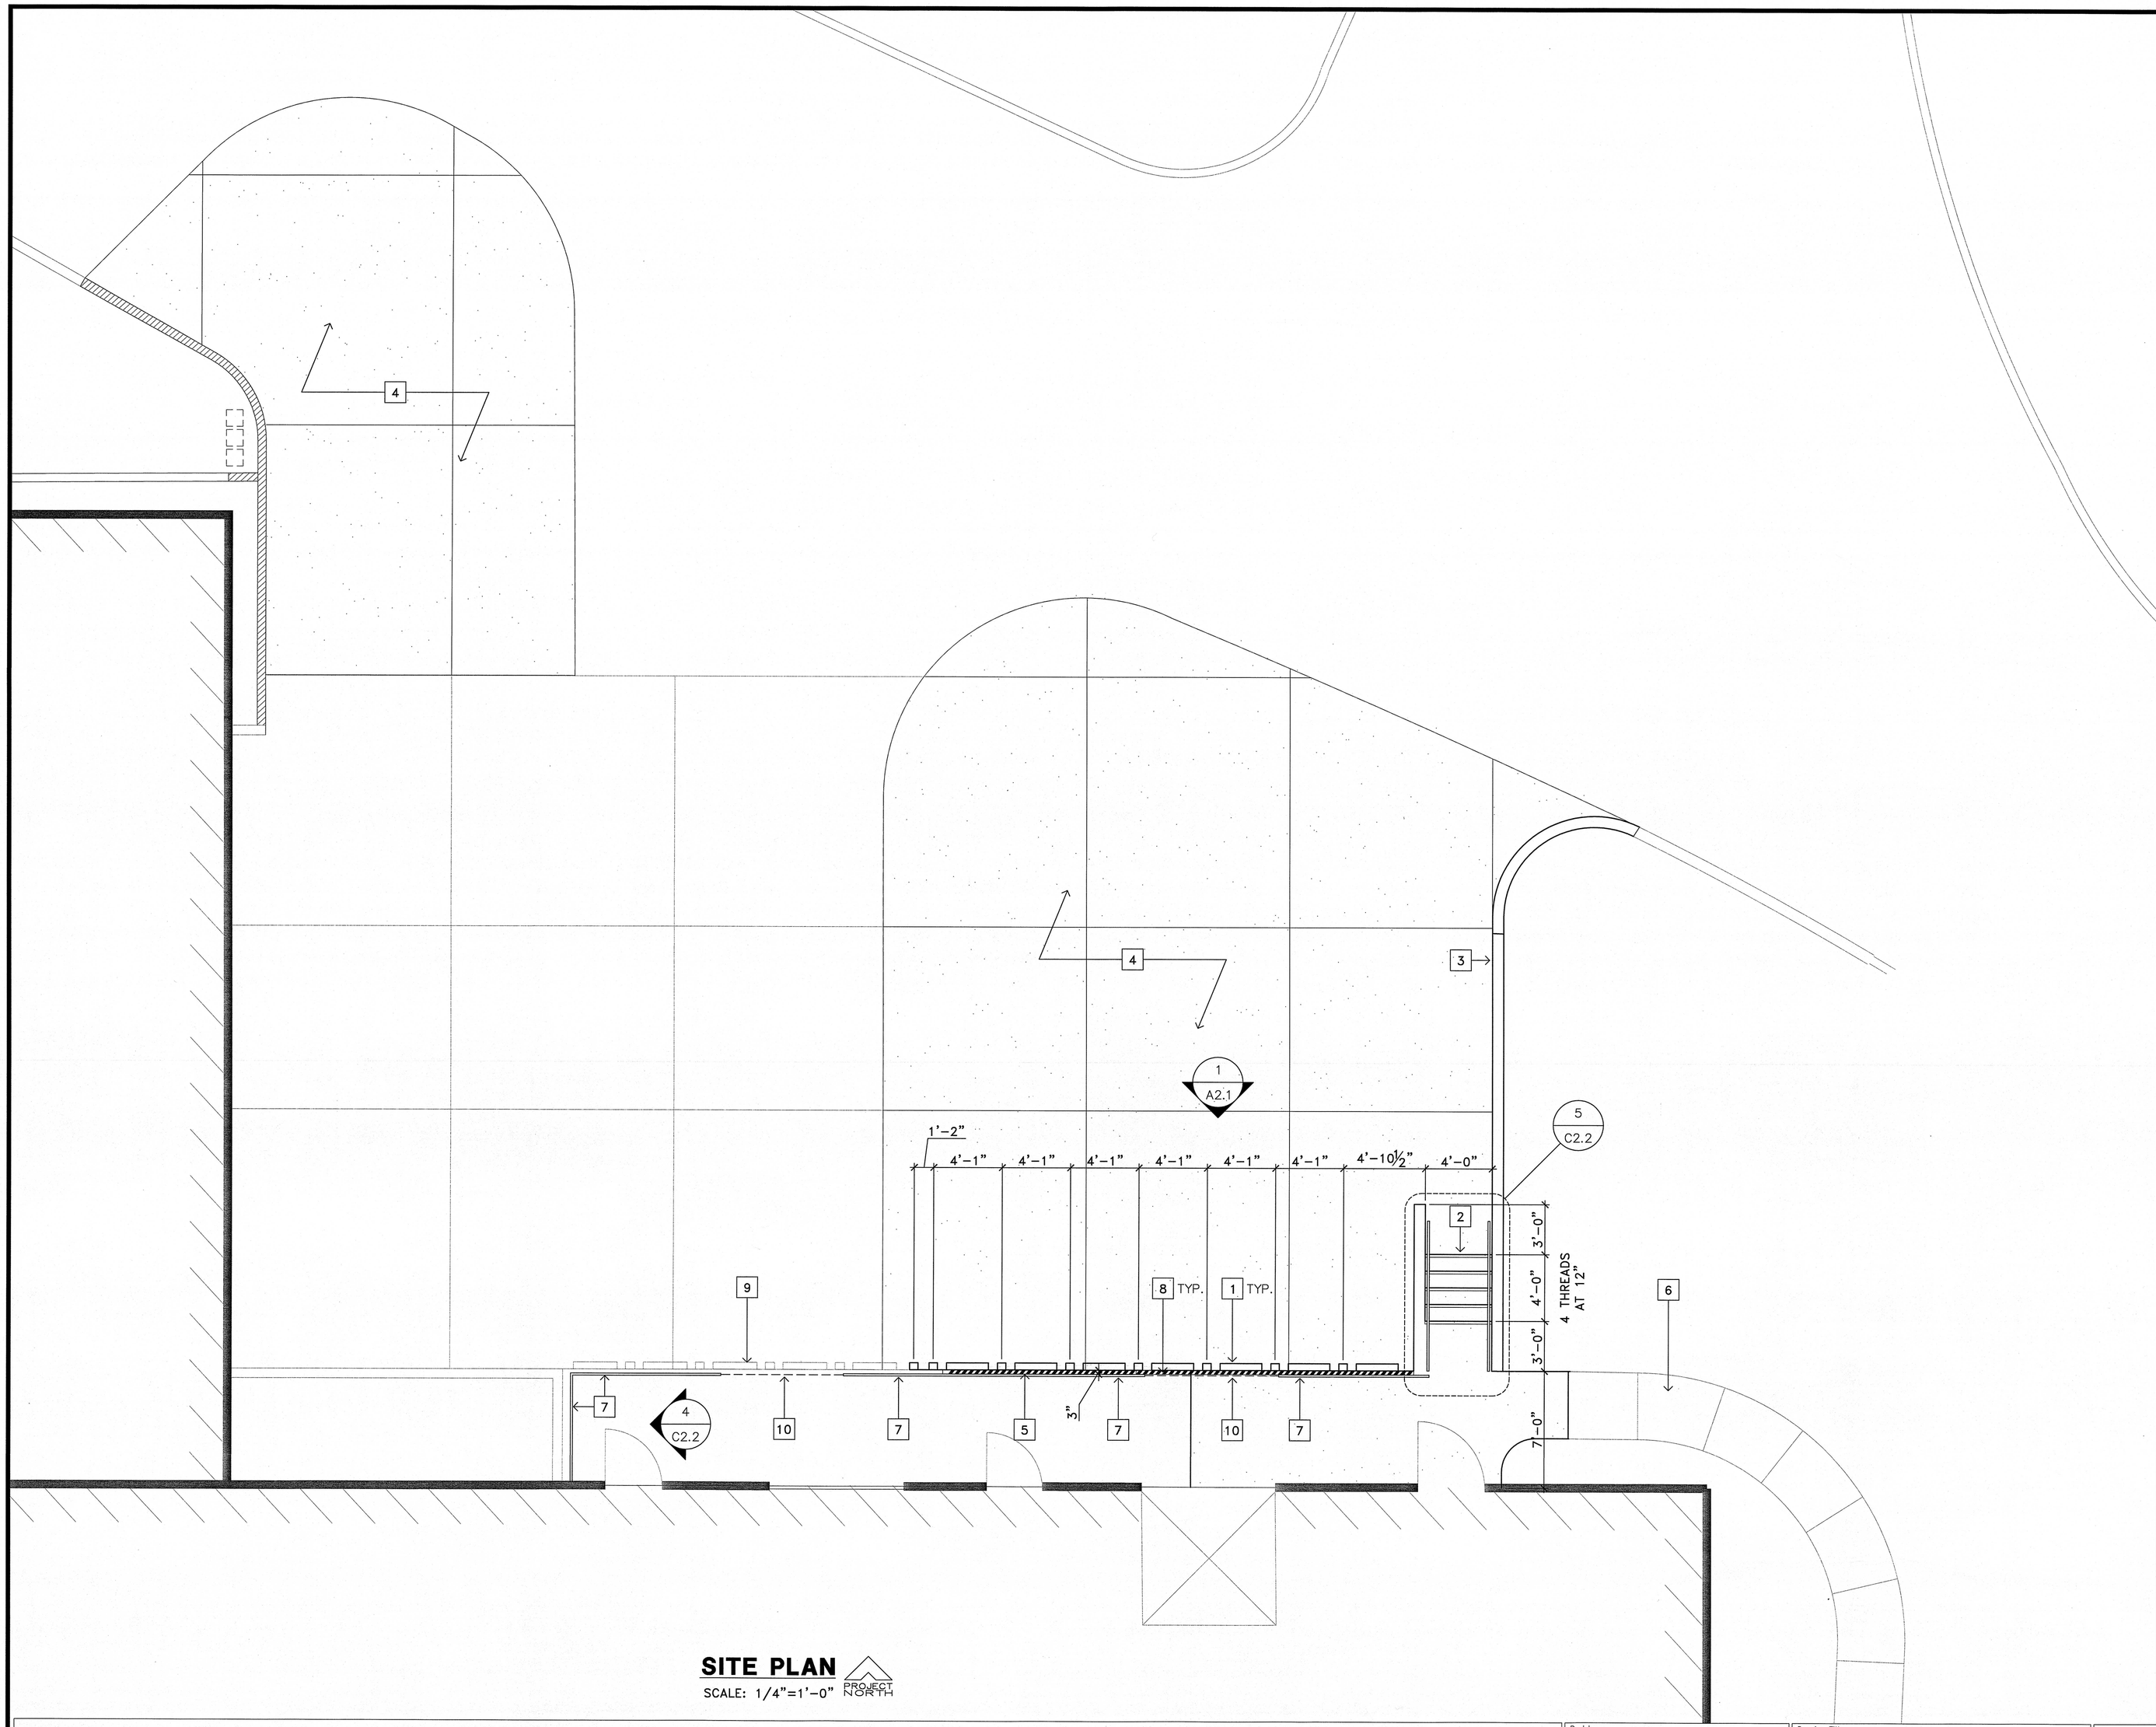

SITE PLAN

SCALE: 1/4"=1'-0"

PROJECT NORTH

KEY NOTES: *

1. PROVIDE (N) BUMPERS
2. (N) HANDRAILS AND CONCRETE STEPS
3. (N) RETAINING WALL (PAINT TO MATCH EXISTING)
4. (N) PAVING
5. PROVIDE (N) FLUSH STEEL ANGLE WITH WARNING STRIP WHERE STEEL CHANNEL IS MISSING; SEE DETAIL 4/A2.1
6. (E) WALKWAY
7. (N) GUARDRAIL
8. (N) FLUSH STEEL CHANNEL WITH WARNING STRIP TO MATCH EXISTING
9. (E) BUMPERS TO REMAIN; REPAINT (E) WALL.
10. REMOVABLE RAIL AND CHAIN

* FOR ALL CONCRETE AND METAL WORK, SEE CIVIL DRAWINGS.

DRAWING SYMBOLS:

1 / A2.1 — ELEVATION CALL OUT

1 / A2.1 — SECTION CUT

3 — KEY NOTE TAG

ABBREVIATIONS:

ALUM.	ALUMINUM
(E)	EXIST(ING)
EQ	EQUAL
LBS	POUNDS
(N)	NEW
O.H.	OPPOSITE HAND
SIM	SIMILAR
T.O.	TOP OF
W/	WITH

SCALE: 3/4"=1'-0"

SCALE: 1/2"=1'-0"

SCALE: 1/4"=1'-0"

SCALE: 1/8"=1'-0"

MSA051911

LICENSED ARCHITECT
JORGE E. ALFARO
C-22051
REN. 03/13
STATE OF CALIFORNIA

K.F. DAVIS ENGINEERING, INC
530 LA GONDA WAY, SUITE E
DANVILLE, CA 94526

Revisions:	Drawing Title: SITE PLAN	Project Title: TAMC E-WING LOADING DOCK EXPANSION	Date: 08/12/11
			Project No.: 459-11-109
Approved:	Approved: Medical Center Director	Drawn: VMAN	Building Number: T1
Approved:	Approved: Chief, Engineering Service	Checked: JA	Location: VAMROC, HONOLULU HAWAII
			DRAWING No. A1.1 Dwg. Of

Department of Veterans Affairs